



**LIFE SCIENCES**

## True Sanitary In-Line Heater

*Designed for Hygienic Applications*

**ALL SANITARY CONNECTIONS**

---

**316L STAINLESS STEEL CONSTRUCTION**

---

**EFFICIENT TEMPERATURE HEATING**

---

**EASY CLEANING & INSPECTION**

---

**GRAVITY DRAINING ASSEMBLY**

---

### FEATURES

- Patented Tri-Clamp Connection Between Heater & Housing
- 32 µin Ra Finish (20/25 Ra Available)
- Removable Heater & End Cap
- Zero Dead Legs
- ASME BPE Design\*
- Certificates\*

\*Available Upon Request




### APPLICATIONS

Parts Cleaning  
Clean-In-Place  
Sterilization  
Water-For-Injection  
Purified Water Heating

## SPECIFICATIONS

<b>Wetted Surfaces</b>	316L Electropolished SS
<b>Max. Temperature</b>	95°C
<b>Max Flow</b>	30 GPM
<b>Process Fluid In/Out</b>	1" Tri-Clamp Fittings
<b>Pressure Rating</b>	60 PSI at 95°C
<b>Safeties</b>	Over-Temperature Thermocouple
	Thermal Cut-Off (Optional)
	Process Sensor (Optional)

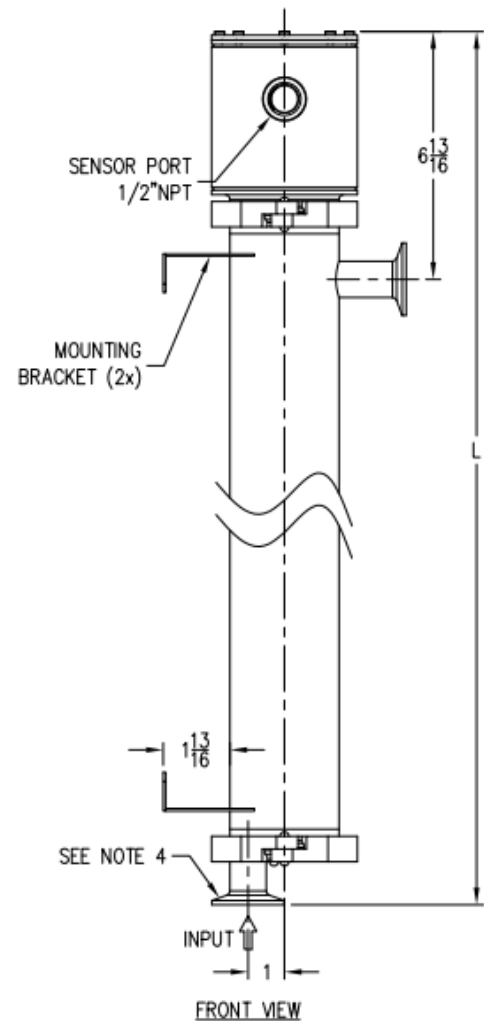

**Patented Sanitary  
Connection Between  
Heater and Input**



## ABOUT HEATEFLEX

Since 1974, Heateflex has led the way in providing advanced heating equipment across the semiconductor, life sciences, food and beverage, pharmaceutical, and medical devices industries.

We have maintained a standard of meeting the industry's stringent demands for increased safety, quality, and performance.

Call on Heateflex to bring our heating solutions to your manufacturing process.



## KW VOLTAGE OPTIONS AMPS LENGTH

KW	VOLTAGE OPTIONS	AMPS	LENGTH
<b>12.0</b>	208	34	27-5/8"
	240	29	26"
	400/480	18/15	28-1/4"
<b>18.0</b>	208	50	37-1/8"
	240	44	35-1/2"
	400/480	26/15	37-3/4"
<b>24.0</b>	208	67	44-3/8"
	240	58	42-7/8"
	400/480	35/29	45"

Heateflex Corporation  
405 E. Santa Clara St. | Arcadia, CA 91006  
P: (626) 599-8566 | [www.heateflex.com](http://www.heateflex.com)